



BREAK SHARP CORNERS MAY BE EITHER CHAMFER OR RADIUS FROM 0.2 mm MIN. TO 1.0 mm MAX.

THIS DRAWING IS A SOLE PROPERTY OF M & M I t d. IT SHOULD NOT BE REPRODUCED IN ANY FORM OR BY ANY MEANS WITHOUT THEIR CONSENT

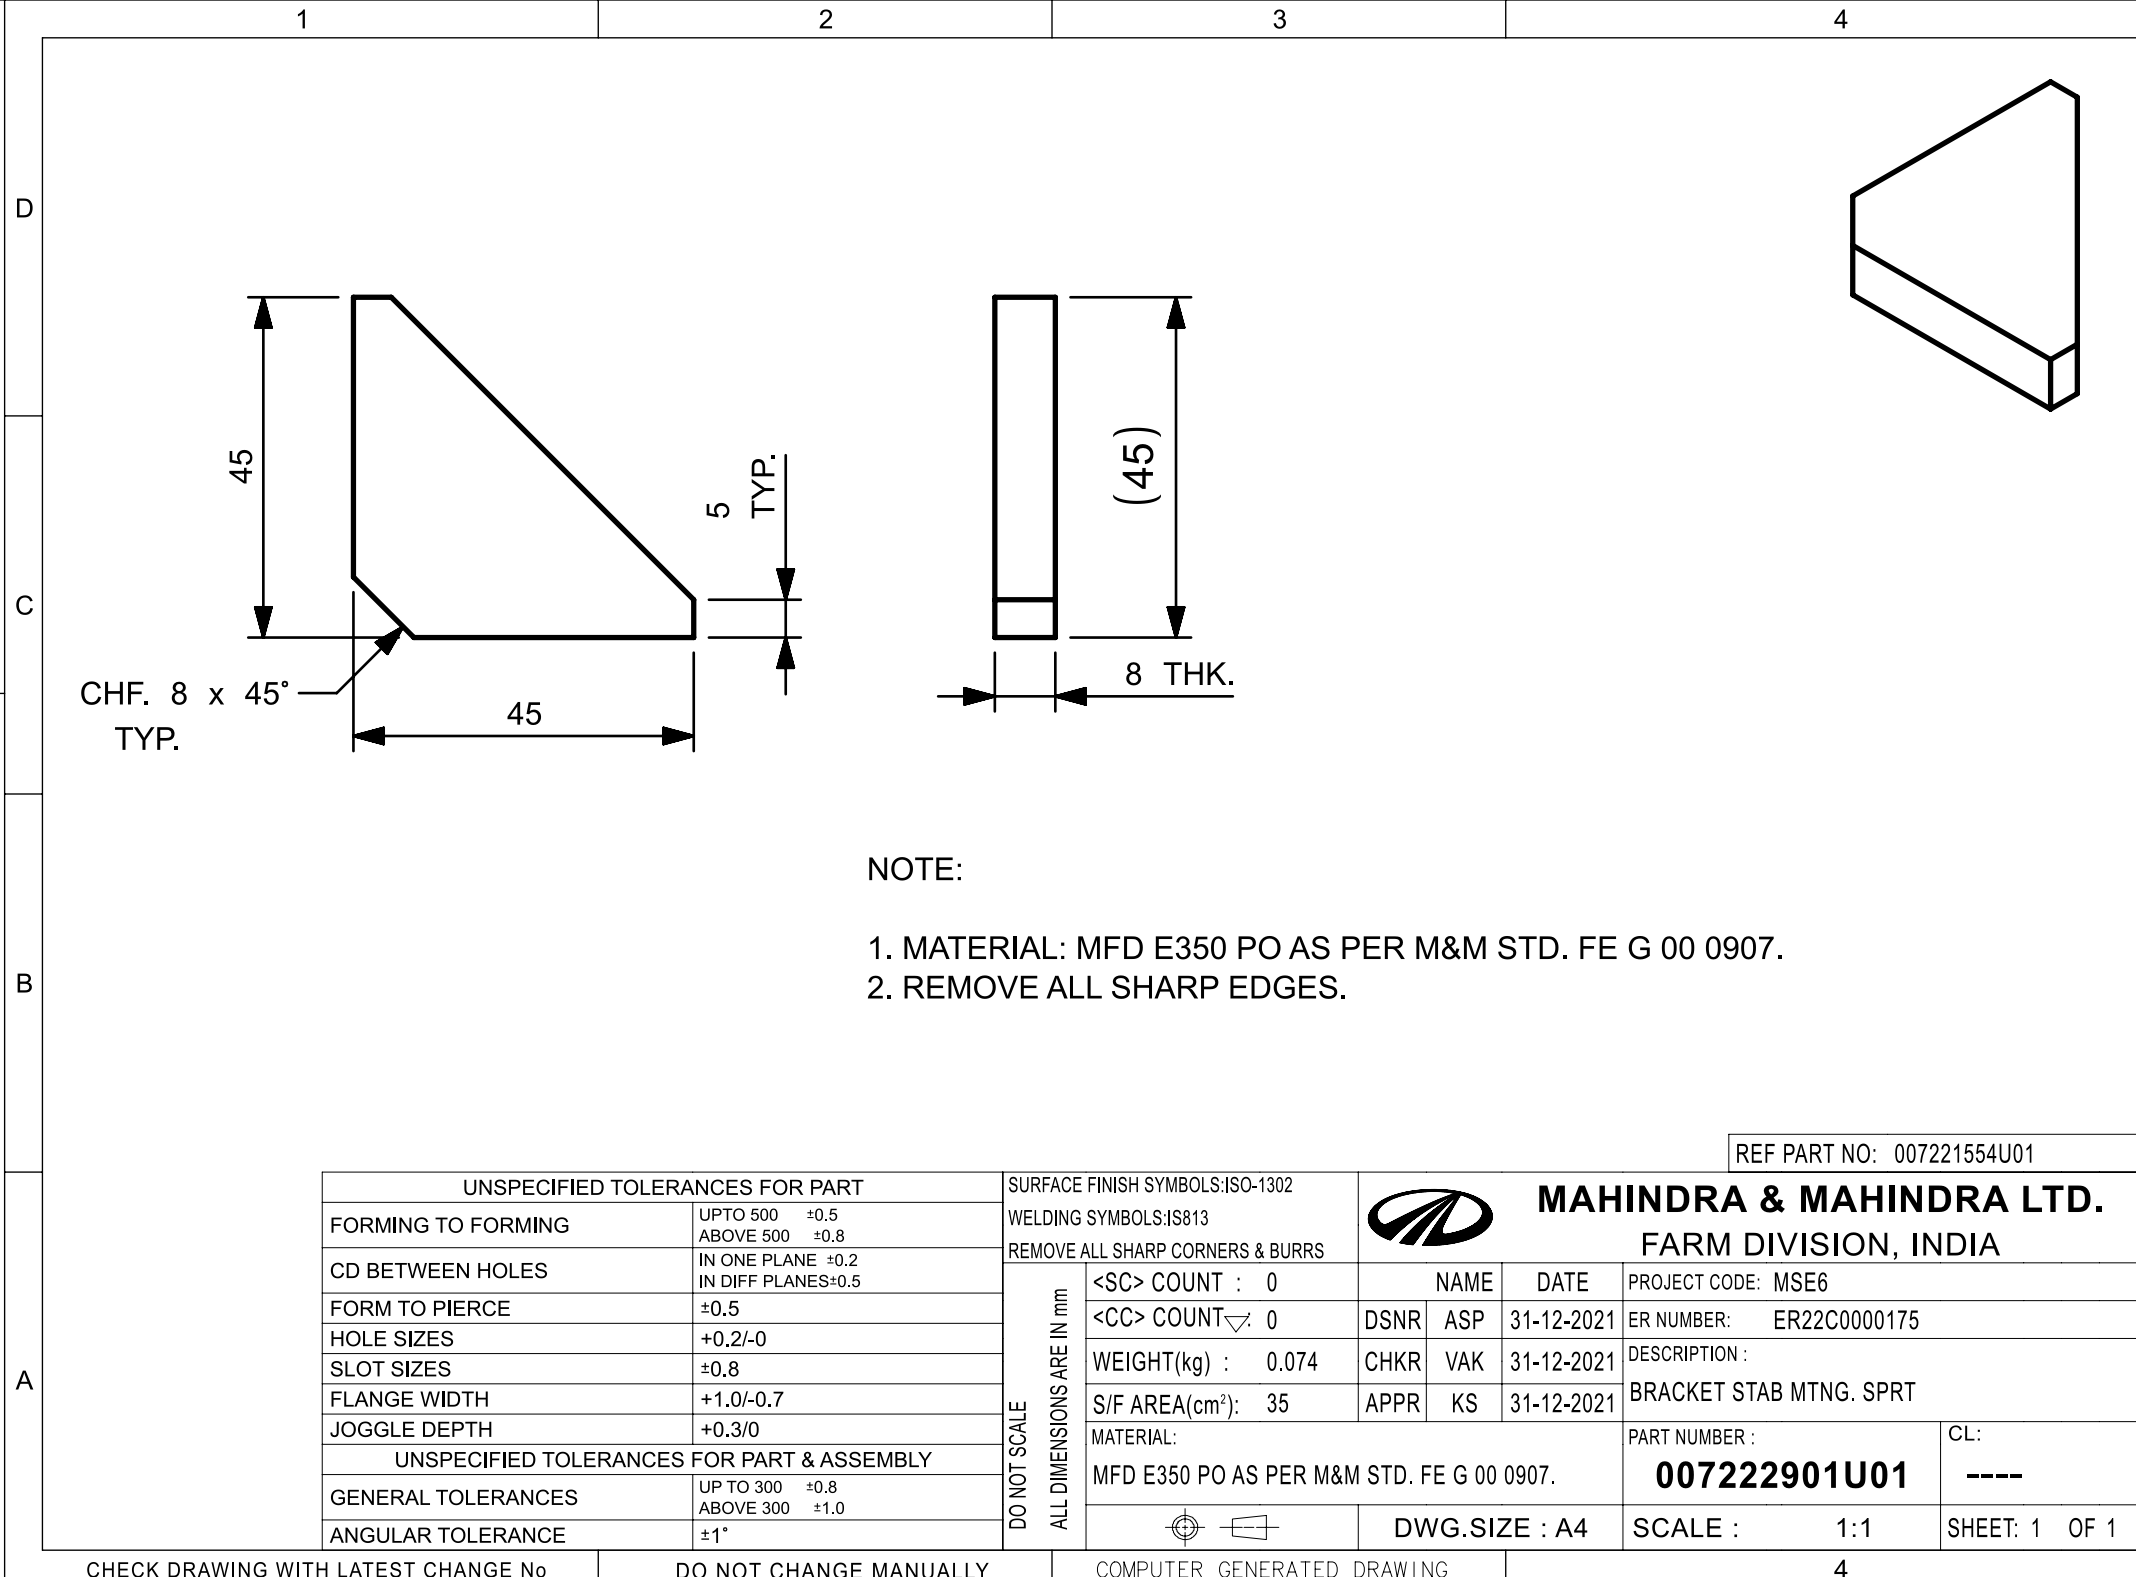

- NOTE:
- 1. MATERIAL: MFD E350 PO AS PER M&M STD. FE G 00 0907.
 - 2. REMOVE ALL SHARP EDGES.

REF PART NO: 007221554U01

UNSPECIFIED TOLERANCES FOR PART		SURFACE FINISH SYMBOLS:ISO-1302		 MAHINDRA & MAHINDRA LTD. FARM DIVISION, INDIA				
FORMING TO FORMING	UPTO 500 ±0.5 ABOVE 500 ±0.8	WELDING SYMBOLS:IS813						
CD BETWEEN HOLES	IN ONE PLANE ±0.2 IN DIFF PLANES±0.5	REMOVE ALL SHARP CORNERS & BURRS						
FORM TO PIERCE	±0.5	DO NOT SCALE ALL DIMENSIONS ARE IN mm	<SC> COUNT : 0	NAME		DATE	PROJECT CODE: MSE6	
HOLE SIZES	+0.2/-0		<CC> COUNT : 0	DSNR	ASP	31-12-2021	ER NUMBER: ER22C0000175	
SLOT SIZES	±0.8		WEIGHT(kg) : 0.074	CHKR	VAK	31-12-2021	DESCRIPTION :	
FLANGE WIDTH	+1.0/-0.7		S/F AREA(cm²): 35	APPR	KS	31-12-2021	BRACKET STAB MTNG. SPRT	
JOGGLE DEPTH	+0.3/0		MATERIAL:				PART NUMBER :	CL:
UNSPECIFIED TOLERANCES FOR PART & ASSEMBLY			MFD E350 PO AS PER M&M STD. FE G 00 0907.				007222901U01	----
GENERAL TOLERANCES	UP TO 300 ±0.8 ABOVE 300 ±1.0			DWG.SIZE : A4		SCALE :	1:1	SHEET: 1 OF 1
ANGULAR TOLERANCE	±1°							